



**Features:**



- Protections:Short circuit/Overload/Over temperature
- Cooling by free air convection
- IP67 design for indoor or outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting
- Products through CE& RoHS certification
- 1 years warranty

**IP67 CE ROHS**

SPECIFICATION

Model		HC-D12036C	HC-D24036C	
Output	Dc Voltage	12V	24V	
	Rated Current	0~3A	0~1.5A	
	Rated Power	36W	36W	
	Ripple&Noise (Max)	150mV	150mV	
	Voltage Tolerance	±5%	±5%	
	Setup, Rise Time	100ms/220VAC		
	Hold Up Time (Typ.)	80ms/220VAC		
Input	Voltage Range	170~250VAC		
	Frequency Range	47~60Hz		
	Power Factor (Typ)	PF>0.6/220VAC		
	Efficiency (Typ)	83%	82%	
	Ac Current (Typ)	0.23A/235V	0.25A/235V	
	Inrush Current (Typ)	Cold-start current 0.45A/235V		
Protection	Short Circuit	Protection type:recovers automatically after fault conditions is removed		
	Overload	Overload protection@145~160%above peak rating		
	Over Temperature	protection typer:shut down o/p voltage.re-power on to recover		
Environment	Working Temp	-30~ +60℃(Refer to output load derating curve)		
	Working Humidity	20~90%RH no-condensing (Waterproof)		
	Storage Temp Humidity	-40~ +80℃、 10~90%RH		
Safety&Emc	Safety Standards	CE Mark(LVD),IP67		
	Withstand Voltage	I/P-O/P:1.5KVAC IP-GND:1.5KVAC		
	Emc Test Standards	EN 55015:2006; EN 61547:1995+A1:2000 ;EN 61000-3-2:2006; EN61000-3-2:1995+A2:2005 EN 61347-1: 2008 EN 61347-2-13: 2006		
NOTE	1.All parameters NOT specially mentioned are measured at 220VAC input, rated laod and 25℃ of ambient temperature.			
	2. Ripple&noise are measured at 20MHz of bandwidth by using a 2' twisted pair-wire terminated with a 0.1uF&10uF parallel capacitor.			
	3. Tolerance:includes set up tolerance, line regulation and load regulation.			

Mechanical specification

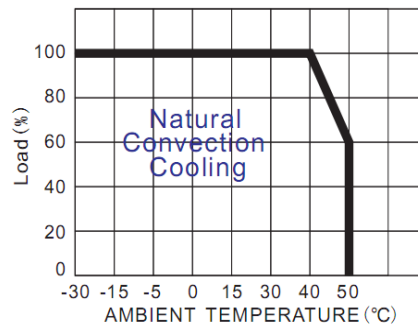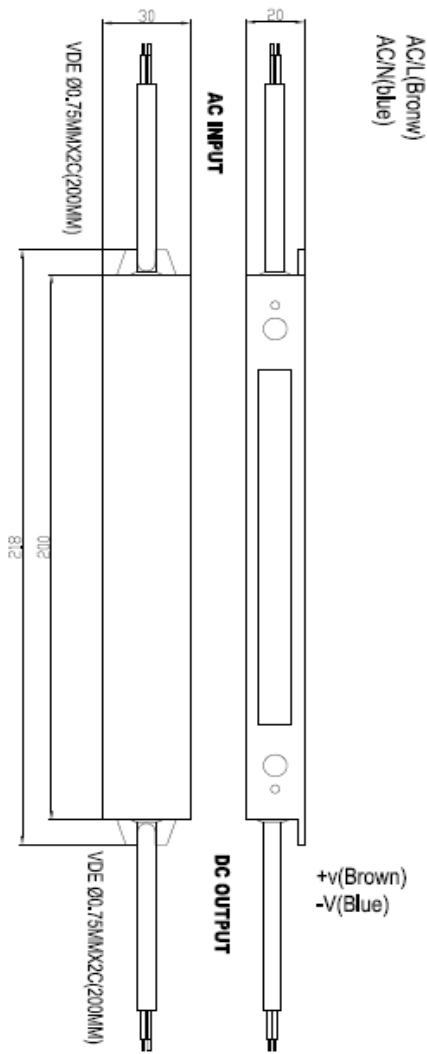

Others	Dimension	200*30*20 (mm) (L*W*H)
	Carton Quantity	50PCS/Carton
	Carton Size	340*240*190
	Weight	0.25kg/pcs